MAGISTRA 700 - FRY TOP

MG7EFTA477R



RIBBED PLATE EL. ON OPEN STAND

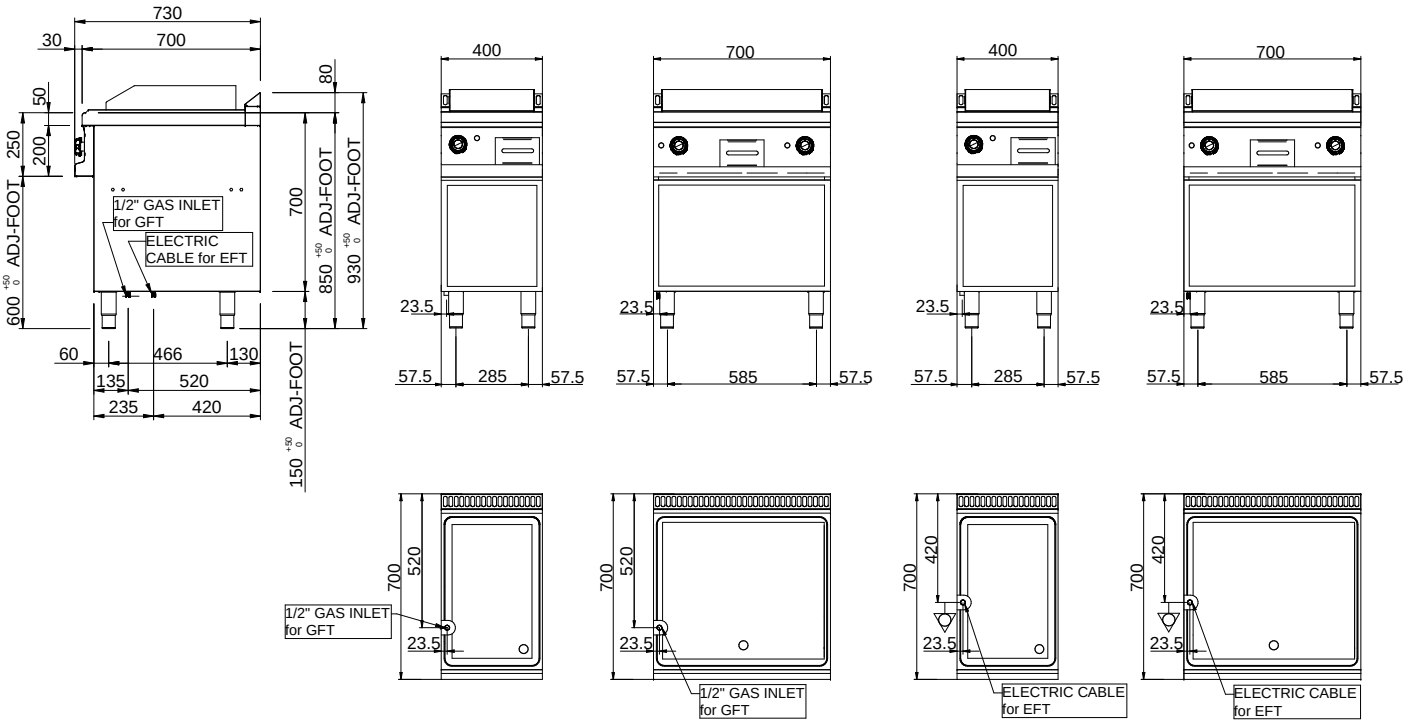
TECHNICAL DATA:

Chromed plate	○
Lined plate	●
Smooth plate	○
External dimensions - WxDxH (cm)	40x70x85
Total power (kW)	4

ADDITIONAL TECHNICAL DATA:

Nr. Electric heating elements 4 kW	1
Supply (N)	400V 3N 50Hz
Weight (kg)	63
Volume (m3)	0,5

The worktop is AISI 304 18/10 stainless steel with thickness of 1 mm. The backsplash, in AISI 304 stainless steel of 3 mm thickness, is welded to the cooking surface for greater ease of use and cleaning. The cooking plate has a thickness of 15 mm and a slight tilt to facilitate cleaning operations and discharge of grease into a removable stainless steel basin with capacity up to 2 liters. In full modules differentiated cooking can be done with two independently-heating electric burners/elements. Gas versions: stainless steel burners with self-stabilizing flame and thermostatic temperature control for a quick recovery of the temperature set. Pilot flame with thrmocouple safety control. Piezo-electric burner ignition. Electric versions: armoured stainless steel electric heating elements; thermostatic temperature control.


730
30
700
80
50
250
200
ADJ-FOOT
600 +50 0
700
850 +50 0
930 +50 0
1/2" GAS INLET for GFT
ELECTRIC CABLE for EFT
60
466
130
135
520
235
420
150 +50 0
400
700
400
700
23.5
57.5
285
585
700
520
420
1/2" GAS INLET for GFT
ELECTRIC CABLE for EFT